C SHARE

Compact Track Loaders / T550 Compact Track Loader

Specifications & Options

■ Standard ✓ Optional N/A Not Applicable Units US

Bobcat T550

Configuration Standard Roller Suspension Option

Engine

Emissions Tier (EPA)	Tier 4	Tier 4	
Engine Cooling	Liquid		
Engine Fuel	Diesel		
Horsepower	66 hp		
Turbocharged Engine	✓		

Performance

Rated Operating Capacity (SAE)	1,995 lb	1,895 lb
Operating Capacity (50% of Tip)	2850 lb	2707 lb
Tipping Load	5700 lb	5414 lb
Operating Weight	7557 lb	7758 lb
Travel Speed	7.1 mph	7.1 mph
Travel Speed (2-speed option)	10.4 mph	n/a
Ground Pressure (Rubber)	4.9 psi	5.8 psi

Capacities

Fuel Tank	36.5 gal	36.5 gal


Hydraulic System

System Relief @ Quick Couplers	3,500 psi		
Auxiliary Std Flow	17.1 gal/min		
Auxiliary High Flow	26.7 gal/min		

Dimension

Length	133 in		
Length without Attachment	104.6 in		
Length with Standard Bucket	133 in		
Width	67 in	71.5 in	
Width (with bucket)	68 in	74 in	
Height	77.8 in		
Height with Operator Cab	77.8 in		
Height to Bucket Hinge Pin	114.5 in		
Reach @ Maximum Height	19.3 in		
Turning Radius	80 in	80 in	
Length of track on ground	54.1 in		
Track Width	12.6 in		
Track Width - Optional	15.8 in		

Features

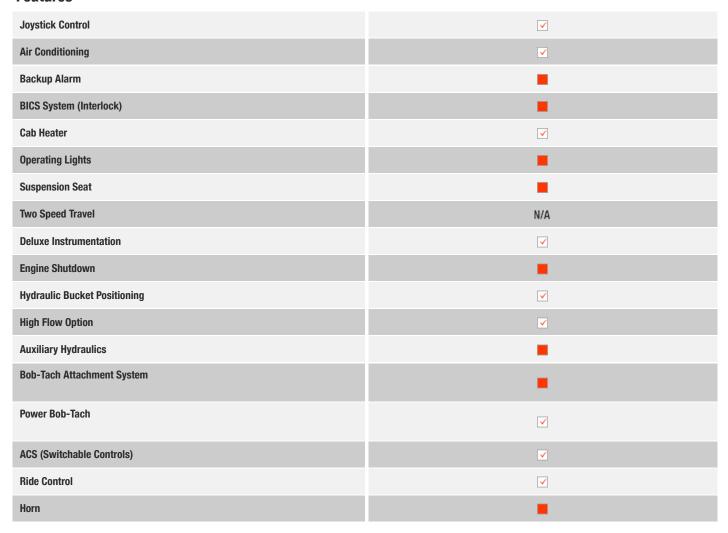

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.