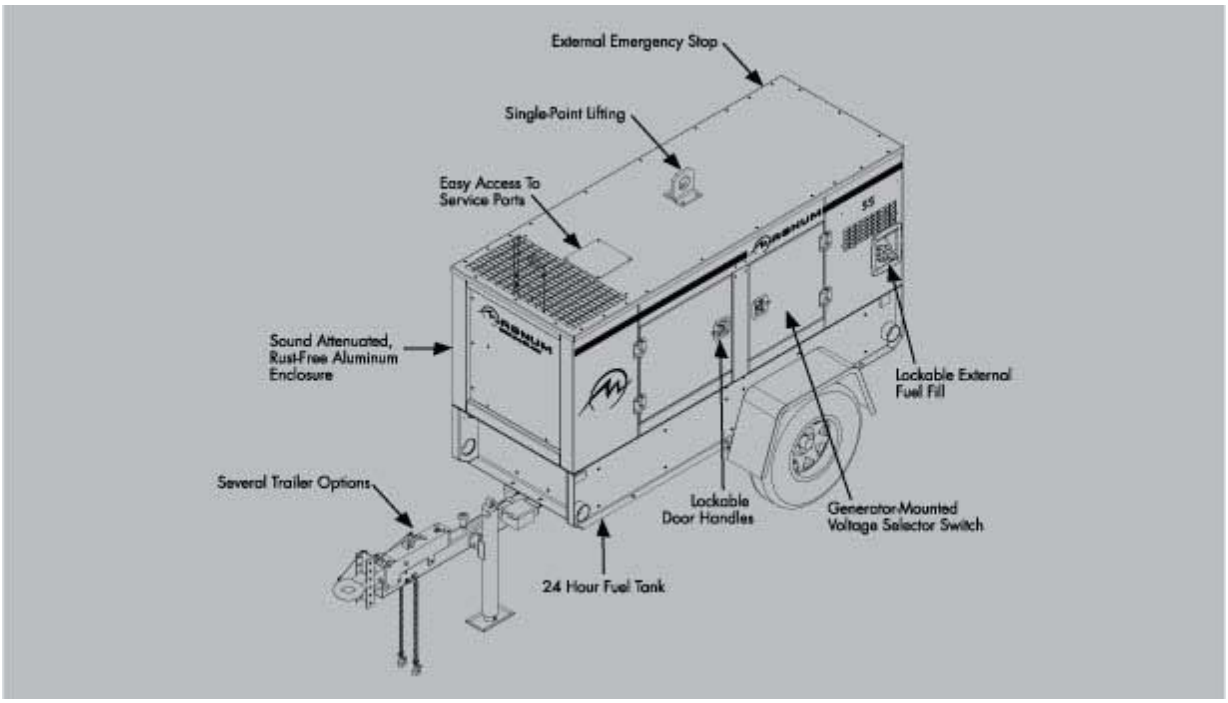
External Emergency Stop
Single-Point Lifting
Easy Access To
Service Ports
Sound Attenuated,
Rust-Free Aluminum
Enclosure
Several Trailer Options
Lockable
Door Handles
24 Hour Fuel Tank
Generator-Mounted
Voltage Selector Switch
Lockable External
Fuel Fill

Model MMG 35

Magnum Mobile Generator
Specifications

Model	MMG 35	MMG 55	MMG 80	MMG 125	MMG 155
Output					
3 Phase - Standby (kw/kva)	29/36	50/62	68/85	108/135	135/169
Amps (480/208 V)	43/100	72/172	102/236	162/375	203/468
3 Phase - Prime (kw/kva)	26/33	43/53	64/80	100/125	125/156
Amps (480/208 V)	40/92	64/149	96/222	150/347	188/434
1 Phase - Standby (kw/kva)	26/26	45/45	60/60	97/97	100/100
Amps (240V)	108	188	250	404	417
1 Phase - Prime (kw/kva)	24/24	41/41	55/55	90/90	95/95
Amps	100	171	229	375	396
AC Voltage 1-phase	120, 139, 208, 220, 240, 277				
AC Voltage 3-phase	208, 220, 440, 480				
Frequency Hz.	60	60	60	60	60
Power Factor	1.0 (1 Phase) / .8 (3 Phase)				
Generator (Brand/Type/Insulation)	Marathon / Brushless / H				
Sound (dB9(A) 23 Feet @ prime)	68	68	68	68	68
Size and Weight					
Skid Mounted (l x w x h)	83x35x53	95x35x55.5	96x38x61.5	132x50x73	132x50x73
Dry Weight lb (kg)	2020 (920)	2345 (1065)	3240 (1470)	5260 (2390)	5260 (2390)
Operating Weight lb (kg)	2475 (1125)	3180 (1445)	4210 (1910)	7020 (3185)	7020 (3185)
Trailer Mounted (l x w x h) (in)	132x57x68	143x57x72	158x60x83.5	210x60x90	210x86x90
Dry Weight lb (kg)	2540 (1150)	2860 (1300)	3490 (1790)	7200 (3270)	7200 (3270)
Operating Weight lb (kg)	2990 (1350)	3700 (1680)	4910 (2230)	8960 (4060)	8960 (4060)
Engine					
Brand	John Deere	John Deere	John Deere	John Deere	John Deere
Aspiration	Turbo	Turbo	Turbo	Turbo	Turbo
HP (prime @ 1800rpm) (kWm)	43 (32)	72 (54)	102 (76)	150 (112)	200 (149)
Displacement C.I.D. (l)	149 (2.4)	186 (3.0)	274 (4.5)	415 (6.8)	415 (6.8)
Cylinders	4	5	4	6	6
Speed (rpm)	1800	1800	1800	1800	1800
Fuel Consumed (prime gal (l)/h)	2.6 (9.8)	4.0 (15.1)	5.6 (21.3)	7.7 (29.1)	9.8 (37.1)
Battery (12 volt)	1 - 12V / 720 CCA				
Capacities					
Fuel Tank gal (l)	62 (234)	116 (440)	135 (511)	245 (927)	245 (927)
Approximate Run Time (hrs)	24	26	24	28	25
Coolant qt (l)	16.0 (15.1)	17.5 (16.5)	19.5 (18.5)	42 (39.7)	42 (39.7)
Oil qt (l)	8.5 (8.0)	9 (8.5)	9 (8.5)	18 (17)	33 (31)
AC Distribution					
Main Breaker	125	225	300	450	600
Voltage Selection	3 Position Switch (Lockable)				
Voltage Regulation	+/- 1%	+/- 1%	+/- 1%	+/- 1%	+/- 1%
120V - 20 amp GFI Duplex	2	2	2	2	2
240V - 30 amp Twist Lock	NA	NA	NA	NA	NA
240V - 50 amp Twist Lock	2	2	3	3	3
Trailer					
Number of Axles & Capacity (lbs)	1 (3500)	1 (5000)	1 (6000)	2 (6000)	2 (6000)
Tire Size (in)	15	15	15	16	16
Brakes	None/Surge/Electric	Surge/Electric	Surge/Electric	Surge/Electric	Surge/Electric
Hitch	2" Ball / 3" Ring	2" Ball / 3" Ring	2" Ball / 3" Ring	2" Ball / 3" Ring	2" Ball / 3" Ring